


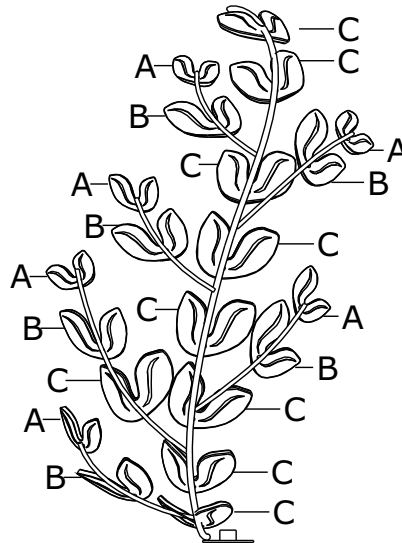



CRYSTORAMA LIGHTING

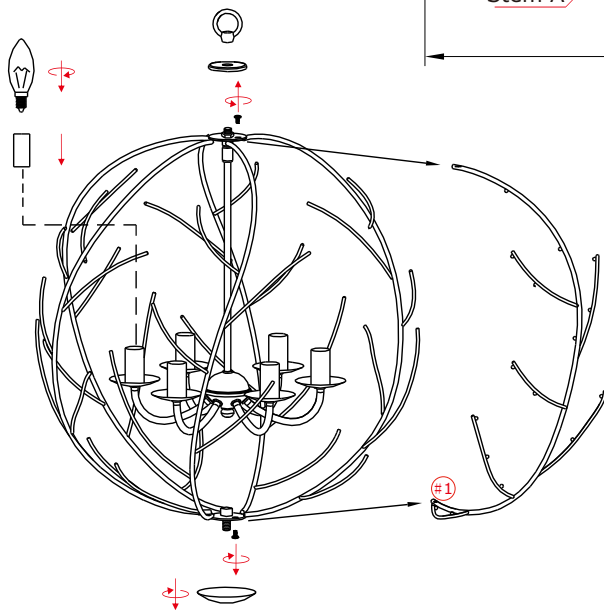

ASSEMBLY INSTRUCTION MODEL #BGT-335-SG-GR

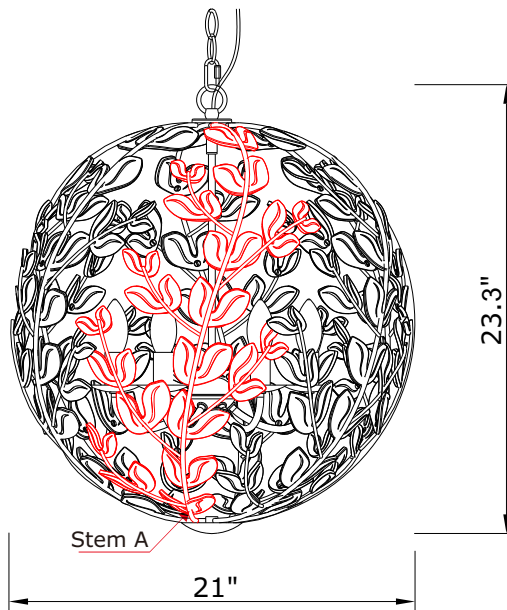

GLASS LEAVES A=36PCS




GLASS LEAVES B=36PCS



GLASS LEAVES C=54PCS



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 6 -Candelabra Base Bulb
40 Watts Recommended 60 Watts Max.
USE LED BULBS FOR EXTENDED USE
THIS FIXTURE IS DAMP RATED

How to install

1. Remove the fixture loop, flat cap and screw from the top of the frame.
2. Remove the metal cap and screw from the bottom of the frame.
3. Remove the stem labeled #1 and place the frame on the foam block used for packaging. Ensure the foam block is covered with the pearl wrap to prevent the frame from being scratched during the installation of the glass leaves. See the illustration on the next page.
4. From the opening of the frame, install the glass leaves onto the frame and stem #1 using a screwdriver, following the corresponding stickers on the frame. Do not overtighten the screws, as this may cause the glass to crack or break.
5. Place the candle sleeve onto the socket, and insert recommended bulbs (not included).
6. Reinstall stem #1 onto the frame and secure it with the screws at both the top and bottom of the frame.
7. Put the flat cap over the top of frame and secure with the loop. Raise the fixture up to the ceiling and do the wire connection. Secure the canopy and glass dish using the collar loop.
8. Put the metal cap over the bottom of the frame and screw it.


WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov.

CRYSTORAMA LIGHTING




PART NUMBER MODEL #BGT-335-SG-GR

Part Number

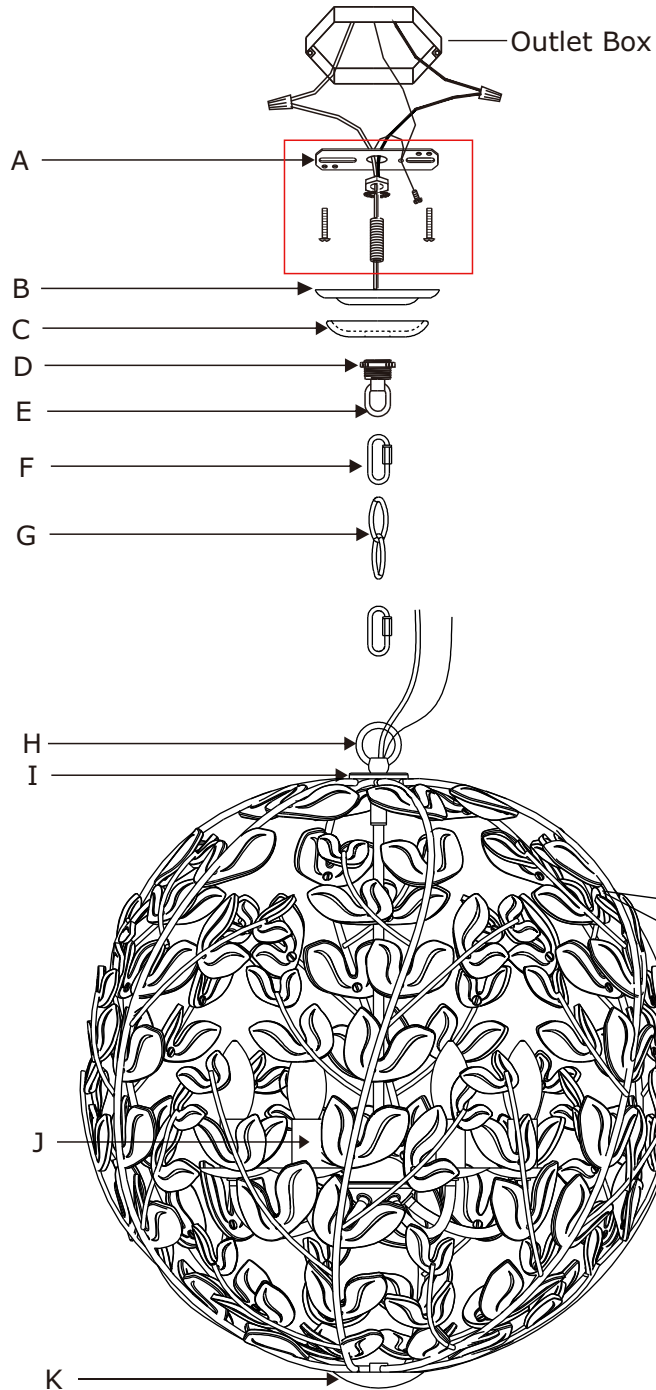

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W4.5",H0.75") #XREBGT330SGGRCAN4.5IN
- C. (1) - Glass Dish(W3.5",H0.76")
- D. (1) - Collar Ring
- E. (1) - Collar Loop
- F. (2) - Quick Link
- G. (1) - Hanging Chain(72",4mm) #XREBGT334SGGRCHA4MM
- H. (1) - Fixture Loop
- I. (1) - Flat Cap
- J. (6) - Candle Sleeve(W1",H2") XREBGT334SGGRCDL2IN
- K.(1) - Bottom Cap
- L.(1) - Screwdriver
- M.(126) - Screw
- N.(252) - Plastic Washer



L=1PC



M=126PCS



N=252PCS

